



# Chapter 10: Windows 10



Operating System Concepts – 10th Edition

Silberschatz, Galvin and Gagne ©2018

1



# Chapter 10: Windows


- History
- Design Principles
- System Components
- Environmental Subsystems
- Networking
- Programmer Interface

Operating System Concepts – 10th Edition

10.2

Silberschatz, Galvin and Gagne ©2018

2



# Objectives


- To explore the principles upon which Windows 10 is designed and the specific components involved in the system
- To understand how Windows 10 can run programs designed for other operating systems

Operating System Concepts – 10th Edition

10.3

Silberschatz, Galvin and Gagne ©2018

3



# Windows 10


- 32-bit preemptive multitasking operating system for Intel microprocessors
- Key goals for the system:
  - portability
  - security
  - POSIX compliance
  - multiprocessor support
  - extensibility
  - international support
  - compatibility with MS-DOS and MS-Windows applications.
- Uses a micro-kernel architecture
- Available in six client versions, Starter, Home Basic, Home Premium, Professional, Enterprise and Ultimate. With the exception of Starter edition (32-bit only) all are available in both 32-bit and 64-bit.
- Available in three server versions (all 64-bit only), Standard, Enterprise and Datacenter

Operating System Concepts – 10th Edition

10.4

Silberschatz, Galvin and Gagne ©2018

4



# History


- In 1988, Microsoft decided to develop a "new technology" (NT) portable operating system that supported both the OS/2 and POSIX APIs
- Originally, NT was supposed to use the OS/2 API as its native environment but during development NT was changed to use the Win32 API, reflecting the popularity of Windows 3.0.

Operating System Concepts – 10th Edition

10.5

Silberschatz, Galvin and Gagne ©2018

5



# Design Principles


- Extensibility — layered architecture
  - Executive, which runs in protected mode, provides the basic system services
  - On top of the executive, several server subsystems operate in user mode
  - Modular structure allows additional environmental subsystems to be added without affecting the executive
- Portability — Windows 10 can be moved from one hardware architecture to another with relatively few changes
  - Written in C and C++
  - Processor-specific portions are written in assembly language for a given processor architecture (small amount of such code).
  - Platform-dependent code is isolated in a dynamic link library (DLL) called the "hardware abstraction layer" (HAL)

Operating System Concepts – 10th Edition

10.6


Silberschatz, Galvin and Gagne ©2018

6




### Design Principles (Cont.)

- Reliability — Windows 10 uses hardware protection for virtual memory, and software protection mechanisms for operating system resources
- Compatibility — applications that follow the IEEE 1003.1 (POSIX) standard can be compiled to run on 10 without changing the source code
- Performance — Windows 10 subsystems can communicate with one another via high-performance message passing
  - Preemption of low priority threads enables the system to respond quickly to external events
  - Designed for symmetrical multiprocessing
- International support — supports different locales via the national language support (NLS) API




Operating System Concepts – 10th Edition 10.7 Silberschatz, Galvin and Gagne ©2018

7




### Windows 10 Architecture

- Layered system of module
- Protected mode — **hardware abstraction layer (HAL)**, kernel, executive
- User mode — collection of subsystems
  - Environmental subsystems emulate different operating systems
  - Protection subsystems provide security functions





Operating System Concepts – 10th Edition 10.8 Silberschatz, Galvin and Gagne ©2018

8




### Depiction of 10 Architecture

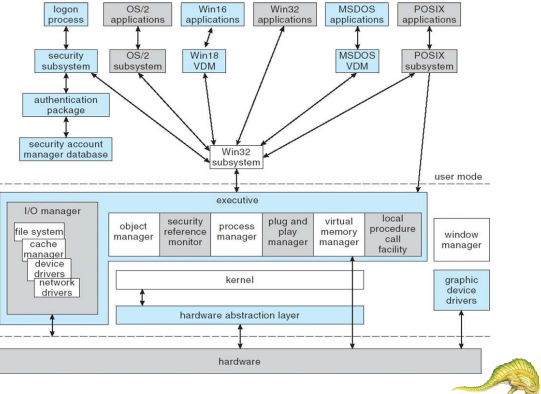




Operating System Concepts – 10th Edition 10.9 Silberschatz, Galvin and Gagne ©2018

9




### System Components — Kernel

- Foundation for the executive and the subsystems
- Never paged out of memory; execution is never preempted
- Four main responsibilities:
  - thread scheduling
  - interrupt and exception handling
  - low-level processor synchronization
  - recovery after a power failure
- Kernel is object-oriented, uses two sets of objects
  - dispatcher objects* control dispatching and synchronization (events, mutants, mutexes, semaphores, threads and timers)
  - control objects* (asynchronous procedure calls, interrupts, power notify, power status, process and profile objects)




Operating System Concepts – 10th Edition 10.10 Silberschatz, Galvin and Gagne ©2018

10




### Kernel — Process and Threads

- The process has a virtual memory address space, information (such as a base priority), and an affinity for one or more processors.
- Threads are the unit of execution scheduled by the kernel's dispatcher.
- Each thread has its own state, including a priority, processor affinity, and accounting information.
- A thread can be one of six states: *ready*, *standby*, *running*, *waiting*, *transition*, and *terminated*.




Operating System Concepts – 10th Edition 10.11 Silberschatz, Galvin and Gagne ©2018

11




### Kernel — Scheduling

- The dispatcher uses a 32-level priority scheme to determine the order of thread execution.
  - Priorities are divided into two classes
    - The real-time class contains threads with priorities ranging from 16 to 31
    - The variable class contains threads having priorities from 0 to 15
- Characteristics of Windows 7's priority strategy
  - Trends to give very good response times to interactive threads that are using the mouse and windows
  - Enables I/O-bound threads to keep the I/O devices busy
  - Complete-bound threads soak up the spare CPU cycles in the background




Operating System Concepts – 10th Edition 10.12 Silberschatz, Galvin and Gagne ©2018

12



### Kernel — Scheduling (Cont.)

- Scheduling can occur when a thread enters the ready or wait state, when a thread terminates, or when an application changes a thread's priority or processor affinity
- Real-time threads are given preferential access to the CPU; but 7 does not guarantee that a real-time thread will start to execute within any particular time limit .
  - This is known as *soft realtime*.




Operating System Concepts – 10<sup>th</sup> Edition

10.13


Silberschatz, Galvin and Gagne ©2018

13



### Windows 7 Interrupt Request Levels

interrupt levels	types of interrupts
31	machine check or bus error
30	power fail
29	interprocessor notification (request another processor to act; e.g., dispatch a process or update the TLB)
28	clock (used to keep track of time)
27	profile
3–26	traditional PC IRQ hardware interrupts
2	dispatch and deferred procedure call (DPC) (kernel)
1	asynchronous procedure call (APC)
0	passive




Operating System Concepts – 10<sup>th</sup> Edition

10.14


Silberschatz, Galvin and Gagne ©2018

14



### Kernel — Trap Handling

- The kernel provides trap handling when exceptions and interrupts are generated by hardware or software.
- Exceptions that cannot be handled by the trap handler are handled by the kernel's **exception dispatcher**.
- The interrupt dispatcher in the kernel handles interrupts by calling either an interrupt service routine (such as in a device driver) or an internal kernel routine.
- The kernel uses spin locks that reside in global memory to achieve multiprocessor mutual exclusion.




Operating System Concepts – 10<sup>th</sup> Edition

10.15


Silberschatz, Galvin and Gagne ©2018

15



### Executive — Object Manager

- Windows 7 uses objects for all its services and entities; the object manager supervises the use of all the objects
  - Generates an object *handle*
  - Checks security
  - Keeps track of which processes are using each object
- Objects are manipulated by a standard set of methods, namely **create, open, close, delete, query name, parse and security**.




Operating System Concepts – 10<sup>th</sup> Edition

10.16


Silberschatz, Galvin and Gagne ©2018

16



### Executive — Naming Objects

- The Windows 7 executive allows almost any object to be given a name, which may be either permanent or temporary. Exceptions are process, thread and some others object types.
- Object names are structured like file path names in MS-DOS and UNIX.
- Windows 7 implements a *symbolic link object*, which is similar to *symbolic links* in UNIX that allow multiple nicknames or aliases to refer to the same file.
- A process gets an object handle by creating an object by opening an existing one, by receiving a duplicated handle from another process, or by inheriting a handle from a parent process.
- Each object is protected by an access control list.




Operating System Concepts – 10<sup>th</sup> Edition

10.17


Silberschatz, Galvin and Gagne ©2018

17



### Executive — Virtual Memory Manager

- The design of the VM manager assumes that the underlying hardware supports virtual to physical mapping a paging mechanism, transparent cache coherence on multiprocessor systems, and virtual addressing aliasing.
- The VM manager in Windows 7 uses a page-based management scheme with a page size of 4 KB.
- The Windows 7 VM manager uses a two step process to allocate memory
  - The first step reserves a portion of the process's address space
  - The second step commits the allocation by assigning space in the system's paging file(s)




Operating System Concepts – 10<sup>th</sup> Edition


10.18

Silberschatz, Galvin and Gagne ©2018

18



### Virtual-Memory Layout

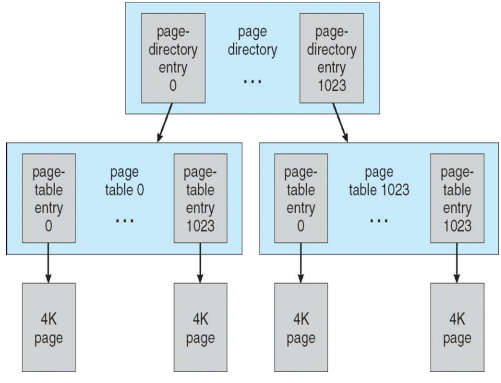


The diagram illustrates the virtual-memory layout. At the top is a 'page directory' containing 'page-directory entry 0' through 'page-directory entry 1023'. An arrow points from 'page-directory entry 0' to a 'page-table entry 0' through 'page-table entry 1023'. Another arrow points from 'page-table entry 0' to a '4K page'.


Operating System Concepts – 10<sup>th</sup> Edition

10.19

Silberschatz, Galvin and Gagne ©2018



19




### Virtual Memory Manager (Cont.)

- The virtual address translation in Windows 7 uses several data structures
  - Each process has a *page directory* that contains 1024 *page directory entries* of size 4 bytes.
  - Each page directory entry points to a *page table* which contains 1024 *page table entries (PTEs)* of size 4 bytes.
  - Each PTE points to a 4 KB *page frame* in physical memory.
- A 10-bit integer can represent all the values from 0 to 1023, therefore, can select any entry in the page directory, or in a page table.
- This property is used when translating a virtual address pointer to a byte address in physical memory.
- A page can be in one of six states: valid, zeroed, free standby, modified and bad.


Operating System Concepts – 10<sup>th</sup> Edition

10.20

Silberschatz, Galvin and Gagne ©2018




20



### Virtual-to-Physical Address Translation

- 10 bits for page directory entry, 20 bits for page table entry, and 12 bits for byte offset in page




The diagram shows a 32-bit virtual address divided into three parts: a 10-bit 'PDE' field, a 20-bit 'PTE' field, and a 12-bit 'page offset' field.

PDE: Page Directory Entry  
PTE: Page Table Entry


Operating System Concepts – 10<sup>th</sup> Edition

10.21


Silberschatz, Galvin and Gagne ©2018



21



### Page File Page-Table Entry




The diagram shows a 32-bit page file page-table entry divided into four parts: a 20-bit 'page address' field, a 5-bit 'protection' field, a 4-bit 'page file' field, and a 3-bit 'V' field.

5 bits for page protection, 20 bits for page frame address, 4 bits to select a paging file, and 3 bits that describe the page state. V = 0


Operating System Concepts – 10<sup>th</sup> Edition

10.22

Silberschatz, Galvin and Gagne ©2018



22




### Executive — Process Manager

- Provides services for creating, deleting, and using threads and processes
- Issues such as parent/child relationships or process hierarchies are left to the particular environmental subsystem that owns the process.


Operating System Concepts – 10<sup>th</sup> Edition

10.23

Silberschatz, Galvin and Gagne ©2018



23




### Executive — Local Procedure Call Facility

- The LPC passes requests and results between client and server processes within a single machine.
- In particular, it is used to request services from the various Windows 7 subsystems.
- When a LPC channel is created, one of three types of message passing techniques must be specified.
  - First type is suitable for small messages, up to 256 bytes; port's message queue is used as intermediate storage, and the messages are copied from one process to the other.
  - Second type avoids copying large messages by pointing to a shared memory section object created for the channel.
  - Third method, called *quick* LPC was used by graphical display portions of the Win32 subsystem.


Operating System Concepts – 10<sup>th</sup> Edition

10.24

Silberschatz, Galvin and Gagne ©2018




24




### Executive — I/O Manager

- The I/O manager is responsible for
  - file systems
  - cache management
  - device drivers
  - network drivers
- Keeps track of which installable file systems are loaded, and manages buffers for I/O requests
- Works with VM Manager to provide memory-mapped file I/O
- Controls the Windows 7 cache manager, which handles caching for the entire I/O system
- Supports both synchronous and asynchronous operations, provides time outs for drivers, and has mechanisms for one driver to call another





Operating System Concepts – 10<sup>th</sup> Edition 10.25 Silberschatz, Galvin and Gagne ©2018

25




### File I/O

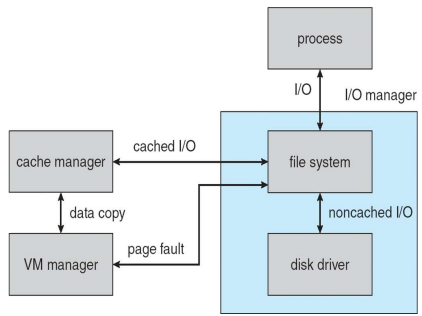




Operating System Concepts – 10<sup>th</sup> Edition 10.26 Silberschatz, Galvin and Gagne ©2018

26




### Executive — Security Reference Monitor

- The object-oriented nature of Windows 7 enables the use of a uniform mechanism to perform runtime access validation and audit checks for every entity in the system.
- Whenever a process opens a handle to an object, the security reference monitor checks the process's security token and the object's access control list to see whether the process has the necessary rights.




Operating System Concepts – 10<sup>th</sup> Edition 10.27 Silberschatz, Galvin and Gagne ©2018

27




### Executive – Plug-and-Play Manager

- Plug-and-Play (PnP) manager is used to recognize and adapt to changes in the hardware configuration.
- When new devices are added (for example, PCI or USB), the PnP manager loads the appropriate driver.
- The manager also keeps track of the resources used by each device.




Operating System Concepts – 10<sup>th</sup> Edition 10.28 Silberschatz, Galvin and Gagne ©2018

28




### Environmental Subsystems

- User-mode processes layered over the native Windows 7 executive services to enable 7 to run programs developed for other operating system.
- Windows 7 uses the Win32 subsystem as the main operating environment; Win32 is used to start all processes.
  - It also provides all the keyboard, mouse and graphical display capabilities.
- MS-DOS environment is provided by a Win32 application called the *virtual dos machine* (VDM), a user-mode process that is paged and dispatched like any other Windows 7 thread.




Operating System Concepts – 10<sup>th</sup> Edition 10.29 Silberschatz, Galvin and Gagne ©2018

29




### Environmental Subsystems (Cont.)

- 16-Bit Windows Environment:
  - Provided by a VDM that incorporates *Windows on Windows*
  - Provides the Windows 3.1 kernel routines and sub routines for window manager and GDI functions
- The POSIX subsystem is designed to run POSIX applications following the POSIX.1 standard which is based on the UNIX model.



Operating System Concepts – 10<sup>th</sup> Edition 10.30 Silberschatz, Galvin and Gagne ©2018


30




## Environmental Subsystems (Cont.)

- OS/2 subsystems runs OS/2 applications
- Logon and Security Subsystems authenticates users logging on to Windows 7 systems
  - Users are required to have account names and passwords.
  - The authentication package authenticates users whenever they attempt to access an object in the system.
  - Windows 7 uses Kerberos as the default authentication package

Operating System Concepts – 10<sup>th</sup> Edition10.31Silberschatz, Galvin and Gagne ©2018




31




## File System

- The fundamental structure of the Windows 7 file system (NTFS) is a *volume*
  - Created by the Windows 7 disk administrator utility
  - Based on a logical disk partition
  - May occupy a portions of a disk, an entire disk, or span across several disks
- All *metadata*, such as information about the volume, is stored in a regular file
- NTFS uses *clusters* as the underlying unit of disk allocation
  - A cluster is a number of disk sectors that is a power of two
  - Because the cluster size is smaller than for the 16-bit FAT file system, the amount of internal fragmentation is reduced

Operating System Concepts – 10<sup>th</sup> Edition10.32Silberschatz, Galvin and Gagne ©2018




32




## Networking

- Windows 7 supports both peer-to-peer and client/server networking; it also has facilities for network management.
- To describe networking in Windows 7, we refer to two of the internal networking interfaces:
  - NDIS (Network Device Interface Specification) — Separates network adapters from the transport protocols so that either can be changed without affecting the other.
  - TDI (Transport Driver Interface) — Enables any session layer component to use any available transport mechanism.
- Windows 7 implements transport protocols as drivers that can be loaded and unloaded from the system dynamically.

Operating System Concepts – 10<sup>th</sup> Edition10.33Silberschatz, Galvin and Gagne ©2018




33




## Networking — Protocols

- The server message block (SMB) protocol is used to send I/O requests over the network. It has four message types:
  1. Session control
  2. File
  3. Printer
  4. Message
- The network basic Input/Output system (NetBIOS) is a hardware abstraction interface for networks
  - Used to:
    - ▶ Establish logical names on the network
    - ▶ Establish logical connections of sessions between two logical names on the network
    - ▶ Support reliable data transfer for a session via NetBIOS requests or *SMBs*

Operating System Concepts – 10<sup>th</sup> Edition10.34Silberschatz, Galvin and Gagne ©2018




34




## Networking — Protocols (Cont.)

- Windows 7 uses the TCP/IP Internet protocol version 4 and version 6 to connect to a wide variety of operating systems and hardware platforms.
- PPTP (Point-to-Point Tunneling Protocol) is used to communicate between Remote Access Server modules running on Windows 7 machines that are connected over the Internet.
- The Data Link Control protocol (DLC) is used to access IBM mainframes and HP printers that are directly connected to the network (possible on 32-bit only versions using unsigned drivers).

Operating System Concepts – 10<sup>th</sup> Edition10.35Silberschatz, Galvin and Gagne ©2018




35




## Networking — Dist. Processing Mechanisms

- Windows 7 supports distributed applications via named NetBIOS, named pipes and mailslots, Windows Sockets, Remote Procedure Calls (RPC), and Network Dynamic Data Exchange (NetDDE).
- NetBIOS applications can communicate over the network using TCP/IP.
- Named pipes are connection-oriented messaging mechanism that are named via the uniform naming convention (UNC).
- Mailslots are a connectionless messaging mechanism that are used for broadcast applications, such as for finding components on the network.
- Winsock, the windows sockets API, is a session-layer interface that provides a standardized interface to many transport protocols that may have different addressing schemes.

Operating System Concepts – 10<sup>th</sup> Edition10.36Silberschatz, Galvin and Gagne ©2018




36



### Distributed Processing Mechanisms (Cont.)

- The Windows 7 RPC mechanism follows the widely-used Distributed Computing Environment standard for RPC messages, so programs written to use Windows 7 RPCs are very portable.
  - RPC messages are sent using NetBIOS, or Winsock on TCP/IP networks, or named pipes on LAN Manager networks.
- Windows 7 provides the Microsoft *Interface Definition Language* to describe the remote procedure names, arguments, and results.




Operating System Concepts – 10<sup>th</sup> Edition

10.37


Silberschatz, Galvin and Gagne ©2018

37



### Networking — Redirectors and Servers

- In Windows 7, an application can use the Windows 7 I/O API to access files from a remote computer as if they were local, provided that the remote computer is running an MS-NET server.
- A *redirector* is the client-side object that forwards I/O requests to remote files, where they are satisfied by a server.
- For performance and security, the redirectors and servers run in kernel mode.




Operating System Concepts – 10<sup>th</sup> Edition

10.38


Silberschatz, Galvin and Gagne ©2018

38



### Name Resolution in TCP/IP Networks

- On an IP network, name resolution is the process of converting a computer name to an IP address
  - e.g., `www.bell-labs.com` resolves to `135.104.1.14`
- Windows 7 provides several methods of name resolution:
  - Windows Internet Name Service (WINS)
  - broadcast name resolution
  - domain name system (DNS)
  - a host file
  - an LMHOSTS file




Operating System Concepts – 10<sup>th</sup> Edition

10.39


Silberschatz, Galvin and Gagne ©2018

39



### Name Resolution (Cont.)

- WINS consists of two or more WINS servers that maintain a dynamic database of name to IP address bindings, and client software to query the servers.
- WINS uses the Dynamic Host Configuration Protocol (DHCP), which automatically updates address configurations in the WINS database, without user or administrator intervention.




Operating System Concepts – 10<sup>th</sup> Edition

10.40


Silberschatz, Galvin and Gagne ©2018

40



### Programmer Interface — Access to Kernel Obj.

- A process gains access to a kernel object named `xxx` by calling the `CreateXXX` function to open a *handle* to `xxx`; the handle is unique to that process.
- A handle can be closed by calling the `CloseHandle` function; the system may delete the object if the count of processes using the object drops to 0.
- Windows 7 provides three ways to share objects between processes
  - A child process inherits a handle to the object
  - One process gives the object a name when it is created and the second process opens that name
  - `DuplicateHandle` function:
    - Given a handle to process and the handle's value a second process can get a handle to the same object, and thus share it




Operating System Concepts – 10<sup>th</sup> Edition

10.41


Silberschatz, Galvin and Gagne ©2018

41



### Programmer Interface — Process Management

- Process is started via the `CreateProcess` routine which loads any dynamic link libraries that are used by the process, and creates a *primary thread*.
- Additional threads can be created by the `CreateThread` function.
- Every dynamic link library or executable file that is loaded into the address space of a process is identified by an *instance handle*.




Operating System Concepts – 10<sup>th</sup> Edition

10.42


Silberschatz, Galvin and Gagne ©2018

42




## Process Management (Cont.)

- Scheduling in Win32 utilizes four priority classes:
  1. `IDLE_PRIORITY_CLASS` (priority level 4)
  2. `NORMAL_PRIORITY_CLASS` (level 8 — typical for most processes)
  3. `HIGH_PRIORITY_CLASS` (level 13)
  4. `REALTIME_PRIORITY_CLASS` (level 24)
- To provide performance levels needed for interactive programs, 7 has a special scheduling rule for processes in the `NORMAL_PRIORITY_CLASS`
  - 7 distinguishes between the *foreground process* that is currently selected on the screen, and the *background processes* that are not currently selected.
  - When a process moves into the foreground, 7 increases the scheduling quantum by some factor, typically 3.




Operating System Concepts – 10<sup>th</sup> Edition 10.43 Silberschatz, Galvin and Gagne ©2018

43




## Process Management (Cont.)

- The kernel dynamically adjusts the priority of a thread depending on whether it is I/O-bound or CPU-bound.
- To synchronize the concurrent access to shared objects by threads, the kernel provides synchronization objects, such as semaphores and mutexes
  - In addition, threads can synchronize by using the `WaitForSingleObject` or `WaitForMultipleObjects` functions.
  - Another method of synchronization in the Win32 API is the critical section.




Operating System Concepts – 10<sup>th</sup> Edition 10.44 Silberschatz, Galvin and Gagne ©2018

44




## Process Management (Cont.)

- A fiber is user-mode code that gets scheduled according to a user-defined scheduling algorithm.
  - Only one fiber at a time is permitted to execute, even on multiprocessor hardware.
  - Windows 7 includes fibers to facilitate the porting of legacy UNIX applications that are written for a fiber execution model.
- Windows 7 also introduced user-mode scheduling for 64-bit systems which allows finer grained control of scheduling work without requiring kernel transitions.




Operating System Concepts – 10<sup>th</sup> Edition 10.45 Silberschatz, Galvin and Gagne ©2018

45




## Programmer Interface — Interprocess Communication

- Win32 applications can have interprocess communication by sharing kernel objects.
- An alternate means of interprocess communications is message passing, which is particularly popular for Windows GUI applications
  - One thread sends a message to another thread or to a window.
  - A thread can also send data with the message.
- Every Win32 thread has its own input queue from which the thread receives messages.
- This is more reliable than the shared input queue of 16-bit windows, because with separate queues, one stuck application cannot block input to the other applications




Operating System Concepts – 10<sup>th</sup> Edition 10.46 Silberschatz, Galvin and Gagne ©2018

46




## Programmer Interface — Memory Management

- Virtual memory:
  - `VirtualAlloc` reserves or commits virtual memory
  - `VirtualFree` decommits or releases the memory
  - These functions enable the application to determine the virtual address at which the memory is allocated
- An application can use memory by memory mapping a file into its address space
  - Multistage process
  - Two processes share memory by mapping the same file into their virtual memory




Operating System Concepts – 10<sup>th</sup> Edition 10.47 Silberschatz, Galvin and Gagne ©2018

47



## Memory Management (Cont.)

- A heap in the Win32 environment is a region of reserved address space
  - A Win 32 process is created with a 1 MB *default heap*
  - Access is synchronized to protect the heap's space allocation data structures from damage by concurrent updates by multiple threads
- Because functions that rely on global or static data typically fail to work properly in a multithreaded environment, the thread-local storage mechanism allocates global storage on a per-thread basis
  - The mechanism provides both dynamic and static methods of creating thread-local storage




Operating System Concepts – 10<sup>th</sup> Edition 10.48 Silberschatz, Galvin and Gagne ©2018

48



# End of Chapter 10

---



Operating System Concepts – 10th Edition

Silberschatz, Galvin and Gagne ©2018