

CS204341- Operating System

ระบบปฏิบัติการ

Sec.001 Varin Chouvatut (ผศ.ดร.วาริน เชาวรัตน์)
Office: CSB109 Email: varin.ch@cmu.ac.th

Sec.002 Worawut Srisukkhom (อ.ดร.วรวัฒน์ ศรีสุขคำ)
Office: CSB107 Email: worawut.s@cmu.ac.th

**Department of Computer Science
Faculty of Science Chiang Mai University**

Operating System Concepts – 10th Edition Silberschatz, Galvin and Gagne ©2018

1



สละเวลา รักษาชีวิต
ลดเสี่ยงติด COVID-19

ขอความร่วมมือนักศึกษาและบุคลากรทุกคนปฏิบัติตาม ดังนี้

Download Application "CMU MOBILE" และลงทะเบียน CMU Account

ทุกวันก่อนเข้าเรียน ทำงาน หรือทำกิจกรรม บนมหาวิทยาลัยเชียงใหม่ ตลอด 24 ชั่วโมง


1. เป็นระบบสุขภาพประจำวัน (CMU Mobile Daily Health Passport) ดาวน์โหลด Application "CMU MOBILE"

2. เข้า Check in สถานที่ทุกแห่ง ที่ตนเองเข้าเรียน ทำงาน หรือทำกิจกรรม ฯลฯ (ผ่านระบบ Application "CMU MOBILE" (ใช้แอปพลิเคชันที่เข้าทำกิจกรรม) โดยแสดง QR Code สำหรับ Check in ตลอดระยะเวลาใช้งาน ห้ามถือ ห้ามฝาก ห้ามคืน

เริ่ม 1 กรกฎาคม 2563

Operating System Concepts – 10th Edition 1.2 Silberschatz, Galvin and Gagne ©2018

2

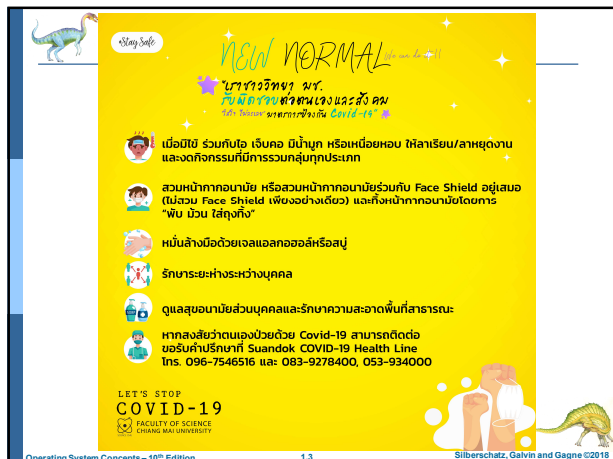

NEW NORMAL

"แนวทางวิถีทาง มร. กับมือเราพัฒนาเองและร่วมใจกัน"
 50+ Solution ในการใช้ชีวิต Covid-19

- เมื่อมีไข้ ร่วมกับ เจ็บคอ มีน้ำมูก หรือเหนื่อยหอบ ไข้สูงเรื้อรัง/ลาหยุดงาน และยังคงมีไข้ควรปรึกษาแพทย์
- สวมหน้ากากอนามัย หรือสวมหน้ากากอนามัยร่วมกับ Face Shield อยู่เสมอ (ไม่สวม Face Shield เพียงอย่างเดียว) และถึงหน้าทากอนามัยอัตโนมัติ "พิน อื่น ใส่งู้ง" "
- หมั่นล้างมือด้วยเจลแอลกอฮอล์หรือสบู่
- รักษาระยะห่างระหว่างบุคคล
- ดูแลสุขภาพอนามัยส่วนบุคคลและรักษาความสะอาดพื้นที่สาธารณะ
- หากสงสัยว่าตนเองป่วยด้วย Covid-19 สามารถติดต่อขอรับบริการที่ Suandok COVID-19 Health Line โทร. 096-7546516 และ 083-9278400, 053-934000

LET'S STOP COVID-19
FACULTY OF SCIENCE
CHIANG MAI UNIVERSITY

Operating System Concepts – 10th Edition 1.3 Silberschatz, Galvin and Gagne ©2018

3

สัดส่วนคะแนนและการวัดผล

- ▢ **เว็บไซต์ของรายวิชา**
<https://www2.cs.science.cmu.ac.th/courses/204341/> หรือเข้าที่เว็บไซต์ภาควิชาได้
- ▢ **คะแนน**

▢ สอบกลางภาค	(* รอคงกับห้องเรียน 16-22 สด. 64*)	35 คะแนน
▢ สอบปลายภาค	(** รับทุกปีตามวันที่ 28 ต.ค. 64 เวลา 8.00-11.00 น. **)	35 คะแนน
▢ งานที่มอบหมาย แบบฝึกหัด (20 คะแนน) และทดสอบย่อย (10 คะแนน)		30 คะแนน
		รวม 100 คะแนน

Operating System Concepts – 10th Edition 1.4 Silberschatz, Galvin and Gagne ©2018

4


Textbook References

- ▢ *Operating System Concepts, 8th ed.* by Silberschatz and Galvin. 2008, John Wiley & Sons, Inc.
- ▢ *Operating System Concepts, 9th ed.* by Silberschatz and Galvin. 2010, John Wiley & Sons, Inc.
- ▢ *Operating System Concepts, 10th ed.* by Silberschatz and Galvin. 2018, John Wiley & Sons, Inc. (ใช้อ้างอิงหลัก)


Operating System Concepts – 10th Edition 1.5 Silberschatz, Galvin and Gagne ©2018

5


Textbook References

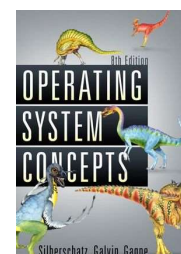

8th Edition

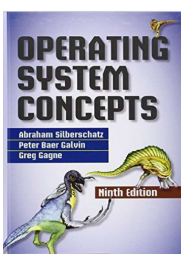

9th Edition

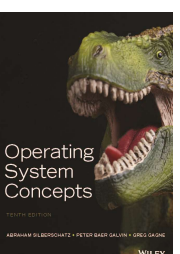


10th Edition

Operating System Concepts – 10th Edition 1.6 Silberschatz, Galvin and Gagne ©2018

6

Chapter 1: Introduction



Operating System Concepts – 10th Edition Silberschatz, Galvin and Gagne ©2018

7

Chapter 1: Introduction

- What Operating Systems Do
- Computer-System Organization
- Computer-System Architecture
- Operating-System Operations
- Resource Management
- Security and Protection
- Virtualization
- Distributed Systems
- Kernel Data Structures
- Computing Environments
- Free/Libre and Open-Source Operating Systems

Operating System Concepts – 10th Edition 1.8 Silberschatz, Galvin and Gagne ©2018

8

Objectives

- Describe the general organization of a computer system and the role of interrupts
- Describe the components in a modern, multiprocessor computer system
- Illustrate the transition from user mode to kernel mode
- Discuss how operating systems are used in various computing environments
- Provide examples of free and open-source operating systems

Operating System Concepts – 10th Edition 1.9 Silberschatz, Galvin and Gagne ©2018

9

What is an Operating System?

- A program that acts as an intermediary between a user of a computer and the computer hardware
- Operating system goals:
 - Execute user programs and make solving user problems easier
 - Make the computer system convenient to use
 - Use the computer hardware in an efficient manner

Operating System Concepts – 10th Edition 1.10 Silberschatz, Galvin and Gagne ©2018

10


Computer System Structure

- Computer system can be divided into four components:
 - Hardware – provides basic computing resources
 - ▶ CPU, memory, I/O devices
 - Operating system
 - ▶ Controls and coordinates use of hardware among various applications and users
 - Application programs – define the ways in which the system resources are used to solve the computing problems of the users
 - ▶ Word processors, compilers, web browsers, database systems, video games
 - Users
 - ▶ People, machines, other computers

Operating System Concepts – 10th Edition 1.11 Silberschatz, Galvin and Gagne ©2018

11

Abstract View of Components of Computer

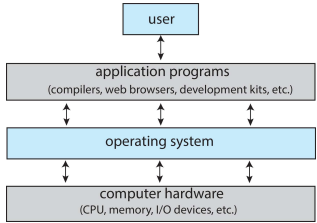

```

graph TD
    User[user] <--> AP[application programs  
(compilers, web browsers, development kits, etc.)]
    AP <--> OS[operating system]
    OS <--> CH[computer hardware  
(CPU, memory, I/O devices, etc.)]
    
```

Operating System Concepts – 10th Edition 1.12 Silberschatz, Galvin and Gagne ©2018

12

What Operating Systems Do

- Depends on the point of view
- Users want convenience, **ease of use** and **good performance**
 - Don't care about **resource utilization**
- But shared computer such as **mainframe** or **minicomputer** must keep all users happy
 - Operating system is a **resource allocator** and **control program** making efficient use of HW and managing execution of user programs
- Users of dedicate systems such as **workstations** have dedicated resources but frequently use shared resources from **servers**
- Mobile devices like smartphones and tables are resource poor, optimized for usability and battery life
 - Mobile user interfaces such as touch screens, voice recognition
- Some computers have little or no user interface, such as embedded computers in devices and automobiles
 - Run primarily without user intervention

13

Defining Operating Systems

- Term OS covers many roles
 - Because of myriad designs and uses of OSES
 - Present in toasters through ships, spacecraft, game machines, TVs and industrial control systems
 - Born when fixed use computers for military became more general purpose and needed resource management and program control
 - ▶ OS is a **resource allocator**
 - Manages all resources
 - Decides between conflicting requests for efficient and fair resource use
 - ▶ OS is a **control program**
 - Controls execution of programs to prevent errors and improper use of the computer

14

Operating System Definition (Cont.)

- No universally accepted definition
- "Everything a vendor ships when you order an operating system" is a good approximation
 - But varies wildly
- "The one program running at all times on the computer" is the **kernel**, part of the operating system
- Everything else is either
 - a **system program** (ships with the operating system, but not part of the kernel) , or
 - an **application program**, all programs not associated with the operating system
- Today's OSES for general purpose and mobile computing also include **middleware** – a set of software frameworks that provide addition services to application developers such as databases, multimedia, graphics

vender : ผู้ขาย
 ships : จัดส่ง
 wildly: ผู้หญิง

15

Computer System Organization

- Computer-system operation
 - One or more CPUs, device controllers connect through common **bus** providing access to shared memory
 - Concurrent execution of CPUs and devices competing for memory cycles

16

Computer-System Operation


- I/O devices and the CPU can execute concurrently
- Each device controller is in charge of a particular device type
- Each device controller has a local buffer
- Each device controller type has an operating system **device driver** to manage it
- CPU moves data from/to main memory to/from local buffers
- I/O is from the device to local buffer of controller
- Device controller informs CPU that it has finished its operation by causing an **interrupt**

17


Common Functions of Interrupts

- Interrupt transfers control to the interrupt service routine generally, through the **interrupt vector**, which contains the addresses of all the service routines
- Interrupt architecture must save the address of the interrupted instruction
- A **trap** or **exception** is a software-generated interrupt caused either by an error or a user request
- An operating system is **interrupt driven**


18

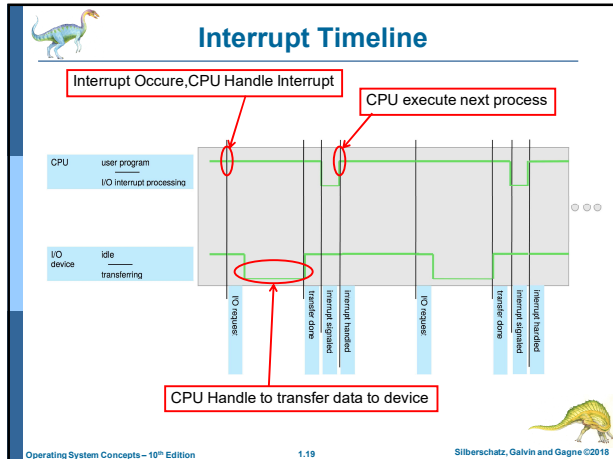


19

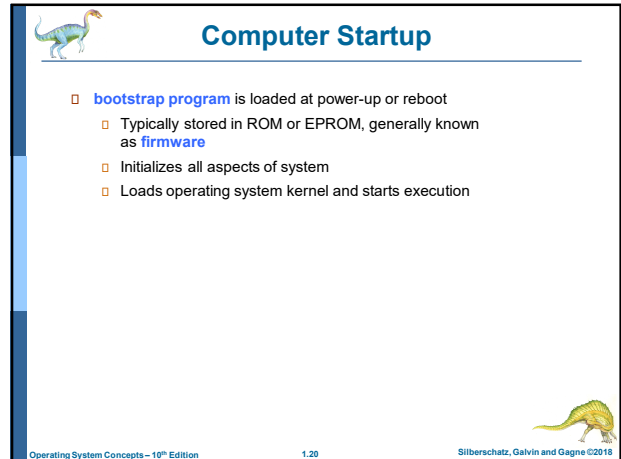


20

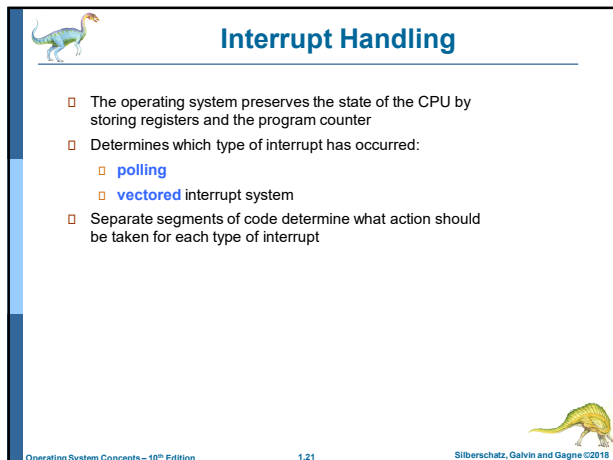


21

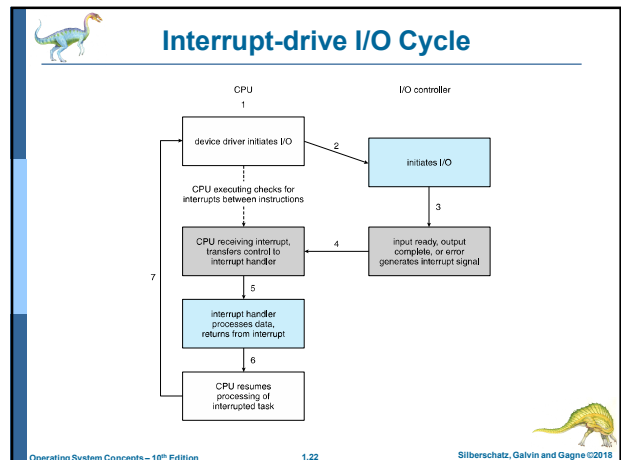

22

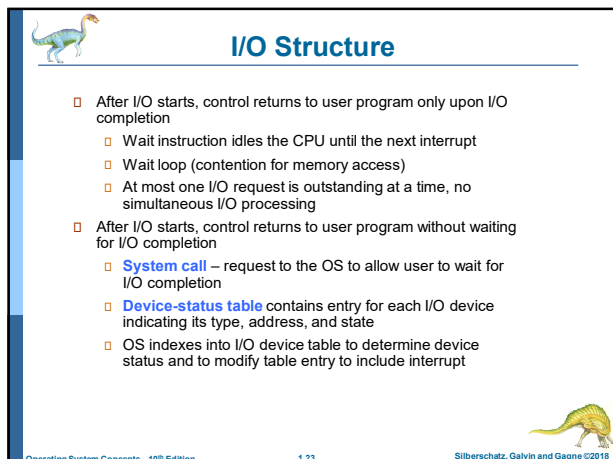

23

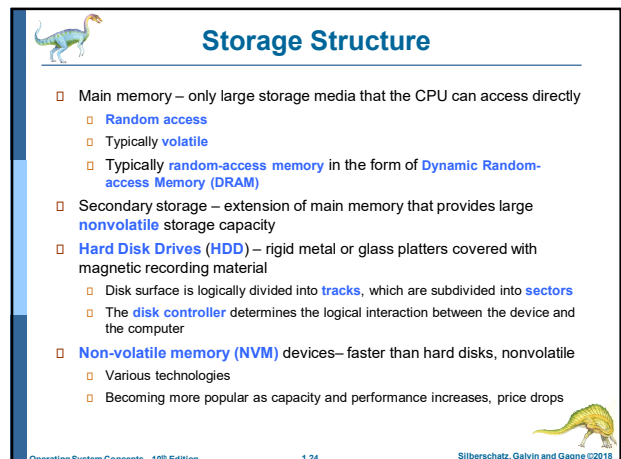

24

Storage Definitions and Notation Review

The basic unit of computer storage is the **bit**. A bit can contain one of two values, 0 and 1. All other storage in a computer is based on collections of bits. Given enough bits, it is amazing how many things a computer can represent: numbers, letters, images, movies, sounds, documents, and programs, to name a few. A **byte** is 8 bits, and on most computers it is the smallest convenient chunk of storage. For example, most computers don't have an instruction to move a bit but do have one to move a byte. A less common term is **word**, which is a given computer architecture's native unit of data. A word is made up of one or more bytes. For example, a computer that has 64-bit registers and 64-bit memory addressing typically has 64-bit (8-byte) words. A computer executes many operations in its native word size rather than a byte at a time.

Computer storage, along with most computer throughput, is generally measured and manipulated in bytes and collections of bytes. A **kilobyte**, or **KB**, is 1,024 bytes; a **megabyte**, or **MB**, is 1,024² bytes; a **gigabyte**, or **GB**, is 1,024³ bytes; a **terabyte**, or **TB**, is 1,024⁴ bytes; and a **petabyte**, or **PB**, is 1,024⁵ bytes. Computer manufacturers often round off these numbers and say that a megabyte is 1 million bytes and a gigabyte is 1 billion bytes. Networking measurements are an exception to this general rule; they are given in bits (because networks move data a bit at a time).

Operating System Concepts – 10th Edition 1.25 Silberschatz, Galvin and Gagne ©2018

25

Storage Hierarchy

- Storage systems organized in hierarchy
 - Speed
 - Cost
 - Volatility
- Caching** – copying information into faster storage system; main memory can be viewed as a cache for secondary storage
- Device Driver** for each device controller to manage I/O
 - Provides uniform interface between controller and kernel

Operating System Concepts – 10th Edition 1.26 Silberschatz, Galvin and Gagne ©2018

26

Storage-Device Hierarchy

The diagram illustrates the storage hierarchy with levels from top to bottom: registers, cache, main memory, nonvolatile memory, hard-disk drives, optical disk, and magnetic tapes. It is divided into three storage types: volatile storage (registers, cache, main memory), nonvolatile storage (nonvolatile memory, hard-disk drives, optical disk), and tertiary storage (magnetic tapes). Access time increases from top to bottom, while storage capacity increases from top to bottom.

Operating System Concepts – 10th Edition 1.27 Silberschatz, Galvin and Gagne ©2018

27

How a Modern Computer Works

The diagram shows the von Neumann architecture. A CPU (N) with a cache is connected to memory. The CPU sends instructions to the cache, which then sends them to memory. Data movement occurs between the cache and memory. The CPU also interacts with a device (M) through I/O buses, sending data and receiving interrupts. DMA (Direct Memory Access) is used for data movement between the device and memory.

A von Neumann architecture

Operating System Concepts – 10th Edition 1.28 Silberschatz, Galvin and Gagne ©2018

28

Direct Memory Access Structure

- Used for high-speed I/O devices able to transmit information at close to memory speeds
- Device controller transfers blocks of data from buffer storage directly to main memory without CPU intervention
- Only one interrupt is generated per block, rather than the one interrupt per byte

intervention: เซ็นแทรกการทำงาน

Operating System Concepts – 10th Edition 1.29 Silberschatz, Galvin and Gagne ©2018

29


Computer-System Architecture

- Most systems use a single general-purpose processor
- Most systems have special-purpose processors as well
- Multiprocessors** systems growing in use and importance
 - Also known as **parallel systems**, **tightly-coupled systems**
 - Advantages include:
 - Increased throughput
 - Economy of scale
 - Increased reliability – graceful degradation or fault tolerance
 - Two types:
 - Asymmetric Multiprocessing** – each processor is assigned a specific task.
 - Symmetric Multiprocessing** – each processor performs all tasks


graceful: สดุดชน degradation: ซ่อมดีดพททท

Operating System Concepts – 10th Edition 1.30 Silberschatz, Galvin and Gagne ©2018


30

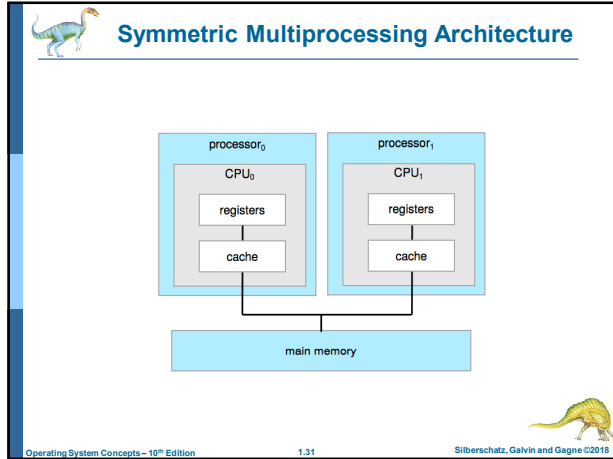


31

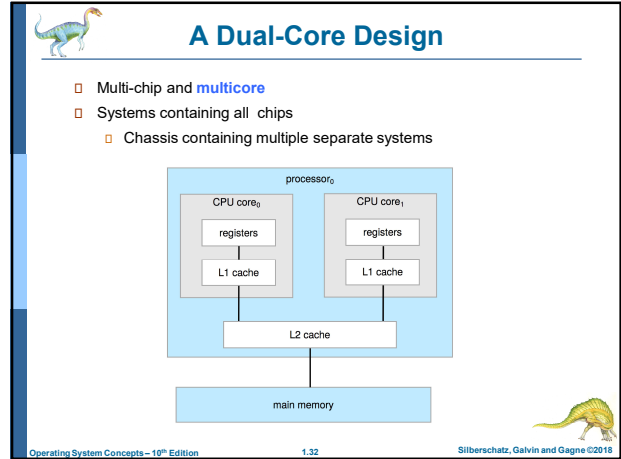


32

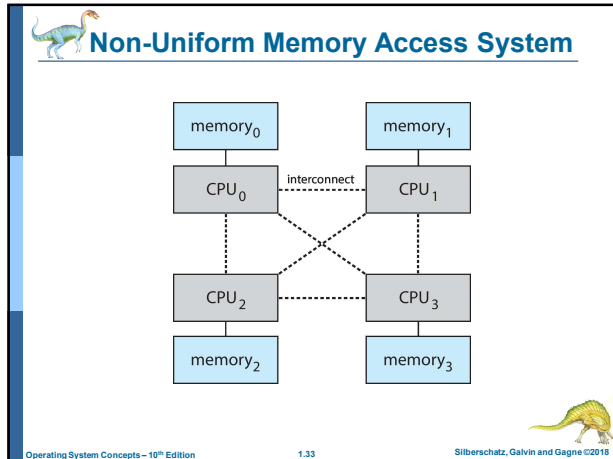


33

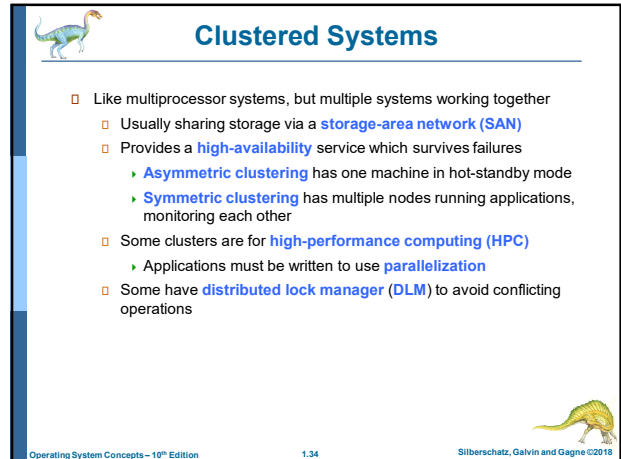

34

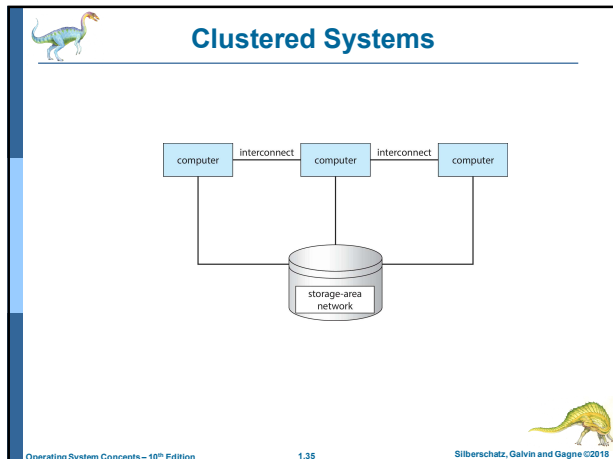

35

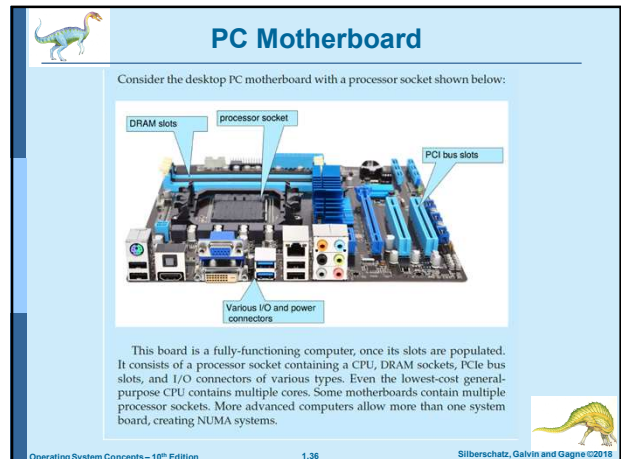

36

Operating-System Operations

- Bootstrap program – simple code to initialize the system, load the kernel
- Kernel loads
- Starts **system daemons** (services provided outside of the kernel)
- Kernel **interrupt driven** (hardware and software)
 - Hardware interrupt by one of the devices
 - Software interrupt (**exception** or **trap**):
 - ▶ Software error (e.g., division by zero)
 - ▶ Request for operating system service – **system call**
 - ▶ Other process problems include infinite loop, processes modifying each other or the operating system

Operating System Concepts – 10th Edition 1.37 Silberschatz, Galvin and Gagne ©2018

37

Multiprogramming and Multitasking

- **Multiprogramming (Batch system)** needed for efficiency
 - Single user cannot keep CPU and I/O devices busy at all times
 - Multiprogramming organizes jobs (code and data) so CPU always has one to execute
 - A subset of total jobs in system is kept in memory
 - One job selected and run via **job scheduling**
 - When it has to wait (for I/O for example), OS switches to another job
- **Timesharing (multitasking)** is logical extension in which CPU switches jobs so frequently that users can interact with each job while it is running, creating **interactive** computing
 - **Response time** should be < 1 second
 - Each user has at least one program executing in memory ⇒ **process**
 - If several jobs ready to run at the same time ⇒ **CPU scheduling**
 - If processes don't fit in memory, **swapping** moves them in and out to run
 - **Virtual memory** allows execution of processes not completely in memory

Operating System Concepts – 10th Edition 1.38 Silberschatz, Galvin and Gagne ©2018

38

Memory Layout for Multiprogrammed System

Operating System Concepts – 10th Edition 1.39 Silberschatz, Galvin and Gagne ©2018

39

Dual-mode and Multimode Operation

- **Dual-mode** operation allows OS to protect itself and other system components
 - **User mode** and **kernel mode**
 - **Mode bit** provided by hardware
 - ▶ Provides ability to distinguish when system is running user code or kernel code
 - ▶ Some instructions designated as **privileged**, only executable in kernel mode
 - ▶ System call changes mode to kernel, return from call resets it to user
- Increasingly CPUs support multi-mode operations
 - i.e. **virtual machine manager (VMM)** mode for guest **VMs**

Operating System Concepts – 10th Edition 1.40 Silberschatz, Galvin and Gagne ©2018

40

Transition from User to Kernel Mode

- Timer to prevent infinite loop / process hogging resources
 - Timer is set to interrupt the computer after some time period
 - Keep a counter that is decremented by the physical clock
 - Operating system set the counter (privileged instruction)
 - When counter zero generate an interrupt
 - Set up before scheduling process to regain control or terminate program that exceeds allotted time

Operating System Concepts – 10th Edition 1.41 Silberschatz, Galvin and Gagne ©2018

41

Process Management

- A process is a program in execution. It is a unit of work within the system. **Program** is a **passive entity**, **process** is an **active entity**.
- Process needs resources to accomplish its task
 - CPU, memory, I/O, files
 - Initialization data
- Process termination requires reclaim of any reusable resources
- Single-threaded process has one **program counter** specifying location of next instruction to execute
 - Process executes instructions sequentially, one at a time, until completion
- Multi-threaded process has one program counter per thread
- Typically system has many processes, some user, some operating system running concurrently on one or more CPUs
 - Concurrency by multiplexing the CPUs among the processes / threads

Operating System Concepts – 10th Edition 1.42 Silberschatz, Galvin and Gagne ©2018

42

Process Management Activities

The operating system is responsible for the following activities in connection with process management:

- Creating and deleting both user and system processes
- Suspending and resuming processes
- Providing mechanisms for process synchronization
- Providing mechanisms for process communication
- Providing mechanisms for deadlock handling

Operating System Concepts – 10th Edition 1.43 Silberschatz, Galvin and Gagne ©2018

43

Memory Management

- To execute a program all (or part) of the instructions must be in memory
- All (or part) of the data that is needed by the program must be in memory
- Memory management determines what is in memory and when
 - Optimizing CPU utilization and computer response to users
- Memory management activities
 - Keeping track of which parts of memory are currently being used and by whom
 - Deciding which processes (or parts thereof) and data to move into and out of memory
 - Allocating and deallocating memory space as needed

Operating System Concepts – 10th Edition 1.44 Silberschatz, Galvin and Gagne ©2018

44

File-system Management

- OS provides uniform, logical view of information storage
 - Abstracts physical properties to logical storage unit - file
 - Each medium is controlled by device (i.e., disk drive, tape drive)
 - Varying properties include access speed, capacity, data-transfer rate, access method (sequential or random)
- File-System management
 - Files usually organized into directories
 - Access control on most systems to determine who can access what
 - OS activities include
 - Creating and deleting files and directories
 - Primitives to manipulate files and directories
 - Mapping files onto secondary storage
 - Backup files onto stable (non-volatile) storage media

Operating System Concepts – 10th Edition 1.45 Silberschatz, Galvin and Gagne ©2018

45

Mass-Storage Management

- Usually disks used to store data that does not fit in main memory or data that must be kept for a "long" period of time
- Proper management is of central importance
- Entire speed of computer operation hinges on disk subsystem and its algorithms
- OS activities
 - Mounting and unmounting
 - Free-space management
 - Storage allocation
 - Disk scheduling
 - Partitioning
 - Protection
- Some storage need not be fast
 - Tertiary storage includes optical storage, magnetic tape
 - Still must be managed – by OS or applications

Operating System Concepts – 10th Edition 1.46 Silberschatz, Galvin and Gagne ©2018

46

Caching

- Important principle, performed at many levels in a computer (in hardware, operating system, software)
- Information in use copied from slower to faster storage temporarily
- Faster storage (cache) checked first to determine if information is there
 - If it is, information used directly from the cache (fast)
 - If not, data copied to cache and used there
- Cache smaller than storage being cached
 - Cache management important design problem
 - Cache size and replacement policy

Operating System Concepts – 10th Edition 1.47 Silberschatz, Galvin and Gagne ©2018

47

Characteristics of Various Types of Storage

Level	1	2	3	4	5
Name	registers	cache	main memory	solid-state disk	magnetic disk
Typical size	< 1 KB	< 16MB	< 64GB	< 1 TB	< 10 TB
Implementation technology	custom memory with multiple ports CMOS	on-chip or off-chip CMOS SRAM	CMOS SRAM	flash memory	magnetic disk
Access time (ns)	0.25-0.5	0.5-25	80-250	25,000-50,000	5,000,000
Bandwidth (MB/sec)	20,000-100,000	5,000-10,000	1,000-5,000	500	20-150
Managed by	compiler	hardware	operating system	operating system	operating system
Backed by	cache	main memory	disk	disk	disk or tape

Movement between levels of storage hierarchy can be explicit or implicit

explicit : กระทำอย่างมีทิศทาง
implicit : กระทำโดยไม่มีทิศทางเป็นนัย

Operating System Concepts – 10th Edition 1.48 Silberschatz, Galvin and Gagne ©2018

48

Migration of data "A" from Disk to Register

```

    graph LR
      A[magnetic disk] -- A --> B[main memory]
      B -- A --> C[cache]
      C -- A --> D[hardware register]
  
```

- Multitasking environments must be careful to use most recent value, no matter where it is stored in the storage hierarchy
- Multiprocessor environment must provide **cache coherency** in hardware such that all CPUs have the most recent value in their cache
- Distributed environment situation even more complex
 - Several copies of a datum can exist
 - Various solutions covered in Chapter 19

datum: ข้อมูล

Operating System Concepts – 10th Edition 1.49 Silberschatz, Galvin and Gagne ©2018

49

I/O Subsystem

- One purpose of OS is to hide peculiarities of hardware devices from the user
- I/O subsystem responsible for
 - Memory management of I/O including buffering (storing data temporarily while it is being transferred), caching (storing parts of data in faster storage for performance), spooling (the overlapping of output of one job with input of other jobs)
 - General device-driver interface
 - Drivers for specific hardware devices

peculiarities : อย่งพิเศษ

Operating System Concepts – 10th Edition 1.50 Silberschatz, Galvin and Gagne ©2018

50

Protection and Security

- Protection** – any mechanism for controlling access of processes or users to resources defined by the OS
- Security** – defense of the system against internal and external attacks
 - Huge range, including denial-of-service, worms, viruses, identity theft, theft of service
- Systems generally first distinguish among users, to determine who can do what
 - User identities (**user IDs**, security IDs) include name and associated number, one per user
 - User ID then associated with all files, processes of that user to determine access control
 - Group identifier (**group ID**) allows set of users to be defined and controls managed, then also associated with each process, file
 - Privilege escalation** allows user to change to effective ID with more rights

distinguish : แ่่งแ่ก
escalation : ี่เพิ่มข้

Operating System Concepts – 10th Edition 1.51 Silberschatz, Galvin and Gagne ©2018

51

Virtualization

- Allows operating systems to run applications within other OSes
 - Vast and growing industry
- Emulation** used when source CPU type different from target type (i.e. PowerPC to Intel x86)
 - Generally slowest method
 - When computer language not compiled to native code – **Interpretation**
- Virtualization** – OS natively compiled for CPU, running **guest** OSes also natively compiled
 - Consider VMware running WinXP guests, each running applications, all on native WinXP **host** OS
 - VMM** (virtual machine Manager) provides virtualization services

Operating System Concepts – 10th Edition 1.52 Silberschatz, Galvin and Gagne ©2018

52

Virtualization (cont.)

- Use cases involve laptops and desktops running multiple OSes for exploration or compatibility
 - Apple laptop running Mac OS X host, Windows as a guest
 - Developing apps for multiple OSes without having multiple systems
 - QA testing applications without having multiple systems
 - Executing and managing compute environments within data centers
- VMM can run natively, in which case they are also the host
 - There is no general purpose host then (VMware ESX and Citrix XenServer)

Operating System Concepts – 10th Edition 1.53 Silberschatz, Galvin and Gagne ©2018

53

Computing Environments - Virtualization

(a) processes, kernel, hardware

(b) processes, kernel, VM1, VM2, VM3, virtual machine manager, hardware

programming interface

Operating System Concepts – 10th Edition 1.54 Silberschatz, Galvin and Gagne ©2018

54

Distributed Systems

- Distributed computing
 - Collection of separate, possibly heterogeneous, systems networked together
 - ▶ **Network** is a communications path, **TCP/IP** most common
 - **Local Area Network (LAN)**
 - **Wide Area Network (WAN)**
 - **Metropolitan Area Network (MAN)**
 - **Personal Area Network (PAN)**
 - **Network Operating System** provides features between systems across network
 - ▶ Communication scheme allows systems to exchange messages
 - ▶ Illusion of a single system

55

Kernel Data Structures

- n Many similar to standard programming data structures
- n **Singly linked list**
- n **Doubly linked list**
- n **Circular linked list**

56

Kernel Data Structures

- **Binary search tree**
left <= right
- Search performance is $O(n)$
- **Balanced binary search tree** is $O(\lg n)$

57

Kernel Data Structures

- **Hash function** can create a **hash map**
- **Bitmap** – string of n binary digits representing the status of n items
- Linux data structures defined in **include files** <linux/list.h>, <linux/kfifo.h>, <linux/rbtree.h>

58

Computing Environments - Traditional

- Stand-alone general purpose machines
- But blurred as most systems interconnect with others (i.e., the Internet)
- **Portals** provide web access to internal systems
- **Network computers (thin clients)** are like Web terminals
- Mobile computers interconnect via **wireless networks**
- Networking becoming ubiquitous – even home systems use **firewalls** to protect home computers from Internet attacks

Portals: ช่องทางเชื่อมต่อ, ประตูเชื่อมต่อ

59

Computing Environments - Mobile

- Handheld smartphones, tablets, etc
- What is the functional difference between them and a "traditional" laptop?
- Extra feature – more OS features (GPS, gyroscope)
- Allows new types of apps like **augmented reality**
- Use IEEE 802.11 wireless, or cellular data networks for connectivity
- Leaders are **Apple iOS** and **Google Android**

60

Computing Environments – Client-Server

- Client-Server Computing
 - Dumb terminals supplanted by smart PCs
 - Many systems now **servers**, responding to requests generated by **clients**
 - Compute-server system** provides an interface to client to request services (i.e., database)
 - File-server system** provides interface for clients to store and retrieve files

Operating System Concepts – 10th Edition 1.61 Silberschatz, Galvin and Gagne ©2016

61

Computing Environments - Peer-to-Peer

- Another model of distributed system
- P2P does not distinguish clients and servers
 - Instead all nodes are considered peers
 - May each act as client, server or both
 - Node must join P2P network
 - Registers its service with central lookup service on network, or
 - Broadcast request for service and respond to requests for service via **discovery protocol**
 - Examples include Napster and Gnutella, **Voice over IP (VoIP)** such as Skype

peer: ระดับเดียวกัน เท่านั้น

Operating System Concepts – 10th Edition 1.62 Silberschatz, Galvin and Gagne ©2016

62

Computing Environments – Cloud Computing

- Delivers computing, storage, even apps as a service across a network
- Logical extension of virtualization because it uses virtualization as the base for its functionality.
 - Amazon **EC2** has thousands of servers, millions of virtual machines, petabytes of storage available across the Internet, pay based on usage
- Many types
 - Public cloud** – available via Internet to anyone willing to pay
 - Private cloud** – run by a company for the company's own use
 - Hybrid cloud** – includes both public and private cloud components
 - Software as a Service (**SaaS**) – one or more applications available via the Internet (i.e., word processor)
 - Platform as a Service (**PaaS**) – software stack ready for application use via the Internet (i.e., a database server)
 - Infrastructure as a Service (**IaaS**) – servers or storage available over Internet (i.e., storage available for backup use)

Petabytes = 1024 terabytes

Operating System Concepts – 10th Edition 1.63 Silberschatz, Galvin and Gagne ©2016

63

Computing Environments – Cloud Computing

- Cloud computing environments composed of traditional OSES, plus VMs, plus cloud management tools
- Internet connectivity requires security like firewalls
- Load balancers spread traffic across multiple applications

Operating System Concepts – 10th Edition 1.64 Silberschatz, Galvin and Gagne ©2016

64

Computing Environments – Real-Time Embedded Systems

- Real-time embedded systems most prevalent form of computers
 - Vary considerable, special purpose, limited purpose OS, **real-time OS**
 - Use expanding
- Many other special computing environments as well
 - Some have OSES, some perform tasks without an OS
- Real-time OS has well-defined fixed time constraints
 - Processing **must** be done within constraint
 - Correct operation only if constraints met

Operating System Concepts – 10th Edition 1.65 Silberschatz, Galvin and Gagne ©2016


65

Free and Open-Source Operating Systems

- Operating systems made available in source-code format rather than just binary **closed-source** and **proprietary**
- Counter to the **copy protection** and **Digital Rights Management (DRM)** movement
- Started by **Free Software Foundation (FSF)**, which has "copyleft" **GNU Public License (GPL)**
 - Free software and open-source software are two different ideas championed by different groups of people
 - <http://gnu.org/philosophy/open-source-misses-the-point.html/>
- Examples include **GNU/Linux** and **BSD UNIX** (including core of **Mac OS X**), and many more
- Can use VMM like VMware Player (Free on Windows), Virtualbox (open source and free on many platforms - <http://www.virtualbox.com>)
 - Use to run guest operating systems for exploration

Operating System Concepts – 10th Edition 1.66 Silberschatz, Galvin and Gagne ©2016

66




The Study of Operating Systems

There has never been a more interesting time to study operating systems, and it has never been easier. The open-source movement has overtaken operating systems, causing many of them to be made available in both source and binary (executable) format. The list of operating systems available in both formats includes Linux, BSD UNIX, Solaris, and part of macOS. The availability of source code allows us to study operating systems from the inside out. Questions that we could once answer only by looking at documentation or the behavior of an operating system we can now answer by examining the code itself.

Operating systems that are no longer commercially viable have been open-sourced as well, enabling us to study how systems operated in a time of fewer CPU, memory, and storage resources. An extensive but incomplete list of open-source operating-system projects is available from http://dmoz.org/Computers/Software/Operating_Systems/Open_Source/

In addition, the rise of virtualization as a mainstream (and frequently free) computer function makes it possible to run many operating systems on top of one core system. For example, VMware (<http://www.vmware.com>) provides a free "player" for Windows on which hundreds of free "virtual appliances" can run. Virtualbox (<http://www.virtualbox.com>) provides a free, open-source virtual machine manager on many operating systems. Using such tools, students can try out hundreds of operating systems without dedicated hardware.


The advent of open-source operating systems has also made it easier to make the move from student to operating-system developer. With some knowledge, some effort, and an Internet connection, a student can even create a new operating-system distribution. Just a few years ago, it was difficult or impossible to get access to source code. Now, such access is limited only by how much interest, time, and disk space a student has.



Operating System Concepts – 10th Edition 1.67 Silberschatz, Galvin and Gagne ©2018

67

End of Chapter 1



Operating System Concepts – 10th Edition Silberschatz, Galvin and Gagne ©2018

68